


HarmonicDrive®

Flat Shape and Hollow Shaft Design

CSD Series/SHD Series

Ratio 1/80 and 1/120 has been added for lineup

CSD Series

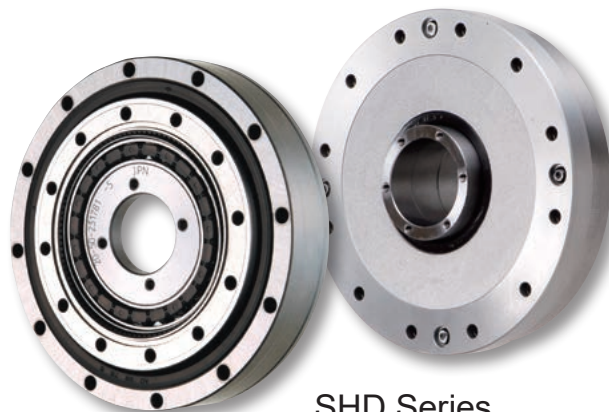

SHD Series

The speed reduction ratio 1/80 and 1/120 has been added to the HarmonicDrive® CSD series and SHD series that have flat shapes and hollow shaft designs, and the product lineup has been enhanced.

Please select the optimum speed reduction ratio for the machine device designs.

Rating Table

CSD-2A (Component type)

 = Additional speed ratio

Size	Gear ratio	Rated torque at input speed 2000r/min		Limit for repeated peak torque		Limit for average torque		Limit for momentary peak torque		Maximum input speed (r/min)		Limit for average input speed (r/min)		Moment of inertia	
		N·m	kgf·m ²	N·m	kgf·m ²	N·m	kgf·m ²	N·m	kgf·m ²	Oil lubricant	Grease lubricant	Oil lubricant	Grease lubricant	I x 10 ⁻⁴ kg·m ²	J x 10 ⁻⁵ kgf·ms ²
14	50	3.7	0.38	12	1.2	4.8	0.49	24	2.4	14000	8500	6500	3500	0.021	0.021
	80	5.4	0.55	16	1.6	7.7	0.79	31	3.2						
	100	5.4	0.55	19	1.9	7.7	0.79	31	3.2						
17	50	11	1.1	23	2.3	18	1.8	48	4.9	10000	7300	6500	3500	0.054	0.055
	80	15	1.5	29	3.0	19	1.9	55	5.6						
	100	16	1.6	37	3.8	27	2.8	55	5.6						
	120	16	1.6	37	3.8	27	2.8	55	5.6						
20	50	17	1.7	39	4.0	24	2.4	69	7.0	10000	6500	6500	3500	0.090	0.092
	80	24	2.4	51	5.2	33	3.4	76 (65)	7.7 (6.6)						
	100	28	2.9	57	5.8	34	3.5	76 (65)	7.7 (6.6)						
	120	28	2.9	60	6.1	34	3.5	76 (65)	7.7 (6.6)						
	160	28	2.9	64	6.5	34	3.5	76 (65)	7.7 (6.6)						
25	50	27	2.8	69	7.0	38	3.9	127	13	7500	5600	5600	3500	0.282	0.288
	80	44	4.5	96	9.8	60	6.1	152 (135)	15 (14)						
	100	47	4.8	110	11	75	7.6	152 (135)	15 (14)						
	120	47	4.8	117	12	75	7.6	152 (135)	15 (14)						
	160	47	4.8	123	13	75	7.6	152 (135)	15 (14)						
32	50	53	5.4	151	15	75	7.6	268	27	7000	4800	4600	3500	1.09	1.11
	80	83	8.5	213	22	117	12	359 (331)	37 (34)						
	100	96	9.8	233	24	151	15	359 (331)	37 (34)						
	120	96	9.8	247	25	151	15	359 (331)	37 (34)						
	160	96	9.8	261	27	151	15	359 (331)	37 (34)						
40	50	96	9.8	281	29	137	14	480	49	5600	4000	3600	3000	2.85	2.91
	80	144	15	364	37	198	20	685 (580)	70 (59)						
	100	185	19	398	41	260	27	694 (580)	71 (59)						
	120	205	21	432	44	315	32	694 (580)	71 (59)						
	160	206	21	453	46	316	32	694 (580)	71 (59)						
50	50	172	18	500	51	247	25	1000	102	4500	3500	3000	2500	8.61	8.78
	80	260	27	659	67	363	37	1300	133						
	100	329	34	686	70	466	48	1440 (1315)	147 (134)						
	120	370	38	756	77	569	58	1440 (1315)	147 (134)						
	160	370	38	823	84	590	60	1577 (1315)	161 (134)						

Note) The parenthesized value indicates the value when the bore of the flexspline has the maximum value (BB type).

CSD-2UH (Unit type)

 = Additional speed ratio

Size	Gear ratio	Rated torque at input speed 2000r/min		Limit for repeated peak torque		Limit for average torque		Limit for momentary peak torque		Maximum input speed (r/min)	Limit for average input speed (r/min)	Moment of inertia	
		N·m	kgf·m ²	N·m	kgf·m ²	N·m	kgf·m ²	N·m	kgf·m ²	Grease lubricant	Grease lubricant	I x 10 ⁻⁴ kg·m ²	J x 10 ⁻⁵ kgf·ms ²
14	50	3.7	0.38	12	1.2	4.8	0.49	24	2.4	8500	3500	0.021	0.021
	80	5.4	0.55	16	1.6	7.7	0.79	35	3.6				
	100	5.4	0.55	19	1.9	7.7	0.79	35	3.6				
17	50	11	1.1	23	2.3	18	1.8	48	4.9	7300	3500	0.054	0.055
	80	15	1.5	29	3.0	19	1.9	61	6.2				
	100	16	1.6	37	3.8	27	2.8	71	7.2				
	120	16	1.6	37	3.8	27	2.8	71	7.2				
20	50	17	1.7	39	4.0	24	2.4	69	7.0	6500	3500	0.090	0.092
	80	24	2.4	51	5.2	33	3.4	89	9.1				
	100	28	2.9	57	5.8	34	3.5	95	9.7				
	120	28	2.9	60	6.1	34	3.5	95	9.7				
	160	28	2.9	64	6.5	34	3.5	95	9.7				
25	50	27	2.8	69	7.0	38	3.9	127	13	5600	3500	0.282	0.288
	80	44	4.5	96	9.8	60	6.1	179	18				
	100	47	4.8	110	11	75	7.6	184	19				
	120	47	4.8	117	12	75	7.6	204	21				
	160	47	4.8	123	13	75	7.6	204	21				
32	50	53	5.4	151	15	75	7.6	268	27	4800	3500	1.09	1.11
	80	83	8.5	213	22	117	12	398	41				
	100	96	9.8	233	24	151	15	420	43				
	120	96	9.8	247	25	151	15	445	45				
	160	96	9.8	261	27	151	15	445	45				
40	50	96	9.8	281	29	137	14	480	49	4000	3000	2.85	2.91
	80	144	15	364	37	198	20	686	70				
	100	185	19	398	41	260	27	700	71				
	120	205	21	432	44	315	32	765	78				
	160	206	21	453	46	316	32	765	78				
50	50	172	18	500	51	247	25	1000	102	3500	2500	8.61	8.78
	80	260	27	659	67	363	37	1300	133				
	100	329	34	686	70	466	48	1440	147				
	120	370	38	756	77	569	58	1565	160				
	160	370	38	823	84	590	60	1715	175				

Additional speed ratio


Additional speed ratio

Additional speed ratio

Additional speed ratio


CSD-2A Outline dimensions

Size		14	17	20	25	32	40	50
Symbol								
ϕA h7		50	60	70	85	110	135	170
B		11	12.5	14	17	22	27	33
ϕC H7		11	15	20	24	32	40	50
ϕD H6	Standard	11	11	16	20	30	32	44
	BB specifications	11	11	20	24	32	40	50

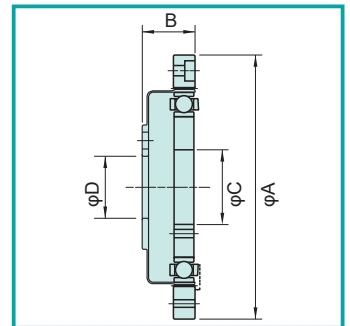


CSD-2UH Outline dimensions

Size		14	17	20	25	32	40	50
Symbol								
ϕA h7		55	62	70	85	112	126	157
B		25	26.5	29.7	37.1	43	51.7	62.5
ϕC H7		11	15	20	24	32	40	50
ϕD H7		12	14	18	24	32	36	48

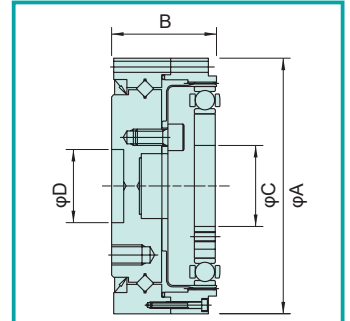


CSD-2UF Outline dimensions

Size		14	17	20	25	32	40
Symbol							
ϕA h7		70	80	90	110	142	170
B		22	22.7	26.8	31.5	37	45
ϕC H7		11	15	20	24	32	40
ϕD		9	9	18	22	29	37

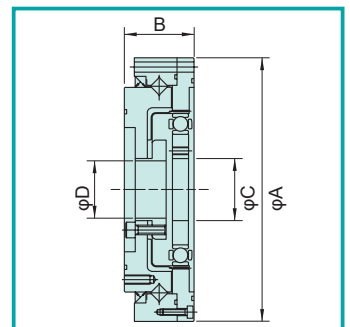


SHD-2SH Outline dimensions

Size		14	17	20	25	32	40
Symbol							
ϕA h7		70	80	90	110	142	170
B		17.5	18.5	19	22	27.9	33
ϕC H7		11	15	20	24	32	40

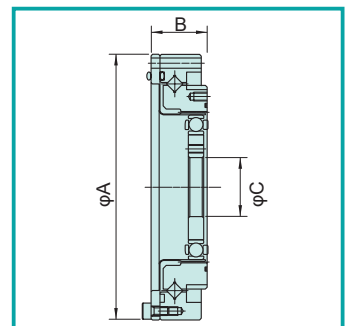

SHD-2UH Outline dimensions

Size		14	17	20	25	32	40
Symbol							
ϕA h7		74	84	95	115	147	175
B		45.5	48	42	46.5	55	65
ϕC H7		14	19	21	29	41	51

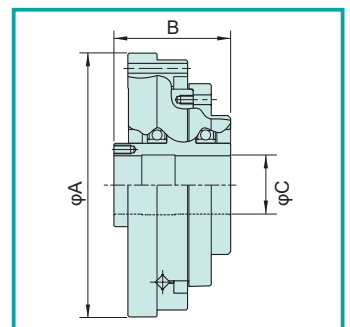

■ Please contact our sales department with any questions.

Head Office

Ichigo Omori Building, 6-25-3 Minami-Oi,
Shinagawa-ku, Tokyo 140-0013 JAPAN
Phone: +81-3-5471-7800 / FAX: +81-3-5471-7811

Tokyo Office

Ichigo Omori Building, 6-25-3 Minami-Oi,
Shinagawa-ku, Tokyo 140-0013 JAPAN
Phone: +81-3-5471-7830 / FAX: +81-3-5471-7836

Tokyo Office, Kitakanto Team

Ichigo Omori Building, 6-25-3 Minami-Oi,
Shinagawa-ku, Tokyo 140-0013 JAPAN
Phone: +81-3-6410-8485 / FAX: +81-3-6410-8486

Koshin Office

1856-1 Hotakamaki, Azumino-shi, Nagano
399-8305 JAPAN
Phone: +81-263-83-6910 / FAX: +81-263-83-6911

Chubu Office

TM21-2F, 21 Terugaoka, Meito-ku, Nagoya-shi,
Aichi 465-0042 JAPAN
Phone: +81-52-773-7451 / FAX: +81-52-773-7462

Kansai Office

Shin-Osaka Ueno Toyo Building 3F, 7-4-17 Nishi-nakajima,
Yodogawa-ku, Osaka-shi, Osaka 532-0011 JAPAN
Phone: +81-6-6 885-5720 / FAX: +81-6-6885-5725

Kyushu Office

NMF Hakata-ekimae Building 7F, 1-15-20 Hakata-ekimae,
Hakata-ku, Fukuoka-shi, Fukuoka 812-0011 JAPAN
Phone: +81-92-451-7208 / FAX: +81-92-481-2493

Overseas Division

1856-1 Hotakamaki, Azumino-shi, Nagano
399-8305 JAPAN
Phone: +81-263-83-6935 / FAX: +81-263-83-6901

Hataka Plant

1856-1 Hotakamaki, Azumino-shi, Nagano
399-8305 JAPAN
Phone: +81-263-83-6935 / FAX: +81-263-83-6901



"HarmonicDrive" is a trademark of Harmonic Drive Systems Inc.
The academic or generic term of our "HarmonicDrive" products is "strain wave gearing."
Harmonic Drive® trademark is registered in Japan, Korea and Taiwan.



Registered Trademark in Japan